




LONGER VENTING

NEW! FEATURES

- **2" PVC Venting up to 60 ft. & 3" PVC Venting up to 150 ft.**
Makes installations easier and compatible with more jobs
- **2" Inlet & Exhaust with band connections**
Makes venting with 2" PVC faster & easier
- **Easy Hanging Bracket (Indoor Models only)**
Allows for quicker unit mounting
- **Pre-wired Remote Control**
Eliminates a step and simplifies installs 
- **120,000 BTU/h model with 6.8 GPM Flow Rate**
Perfect for lower BTU spec condo and apartment installations

RTGH-DVLN-2
RTGH-XLN-2

11,000-199,900 BTU/h
Natural and LP Gas Models
Indoor & Outdoor Models

The Rheem Difference



BUILT-IN CONDENSATE NEUTRALIZER

Industry First!
Safely dispose of
condensate without extra
installation cost and time



HOT START PROGRAMMING

Rheem Exclusive!
Minimizes cold water
bursts by staying in
ready-fire state for
back-to-back hot water
needs



OVERHEAT FILM WRAP

Rheem Exclusive!
Safety feature prevents
dangerous temperatures
allowing industry-best,
1/2" side-to-side clearance
to combustibles



LOW FLOW ACTIVATION

Industry Leading!
Minimum flow rate of .26
GPM and activation flow
rate of .40 GPM ensures
hot water in low demand
situations



The new degree of comfort.®

Rheem.com



NEW! Prestige® High Efficiency Condensing Tankless Water Heaters




Energy Factor	Up to .93 UEF
Venting Type	Vents with Schedule 40 PVC
Dimensions	27-1/2" H x 18-1/2" W x 9-3/4" D
Weight	82 lbs.
Warranty	Heat Exchanger: 12 Years Residential; 5 Years Commercial
	Parts: 5 Years
	Labor: 1 Year
Ultra Low NOx	All Natural Gas Models
Energy Savings	Up to \$1,100¹

Description	199,900 BTU Max.
EcoNet WiFi Included: Indoor – Nat. Gas	RTGH-95DVELN-2
EcoNet WiFi Included: Outdoor – Nat. Gas	RTGH-95XELN-2

Description	NEW! 120,000 BTU Max.	157,000 BTU Max.	180,000 BTU Max.	199,900 BTU Max.
Indoor – Nat. Gas	RTGH-68DVLN-2	RTGH-84DVLN-2	RTGH-90DVLN-2	RTGH-95DVLN-2
Outdoor – Nat. Gas	RTGH-68XLN-2	RTGH-84XLN-2	RTGH-90XLN-2	RTGH-95XLN-2

¹Based on comparison against 50-gallon tank type model with like fuel type. Savings based on Natural gas model; Savings higher for liquid propane models.

Liquid Propane models also available, swap **N** for **P** in model numbers for LP.

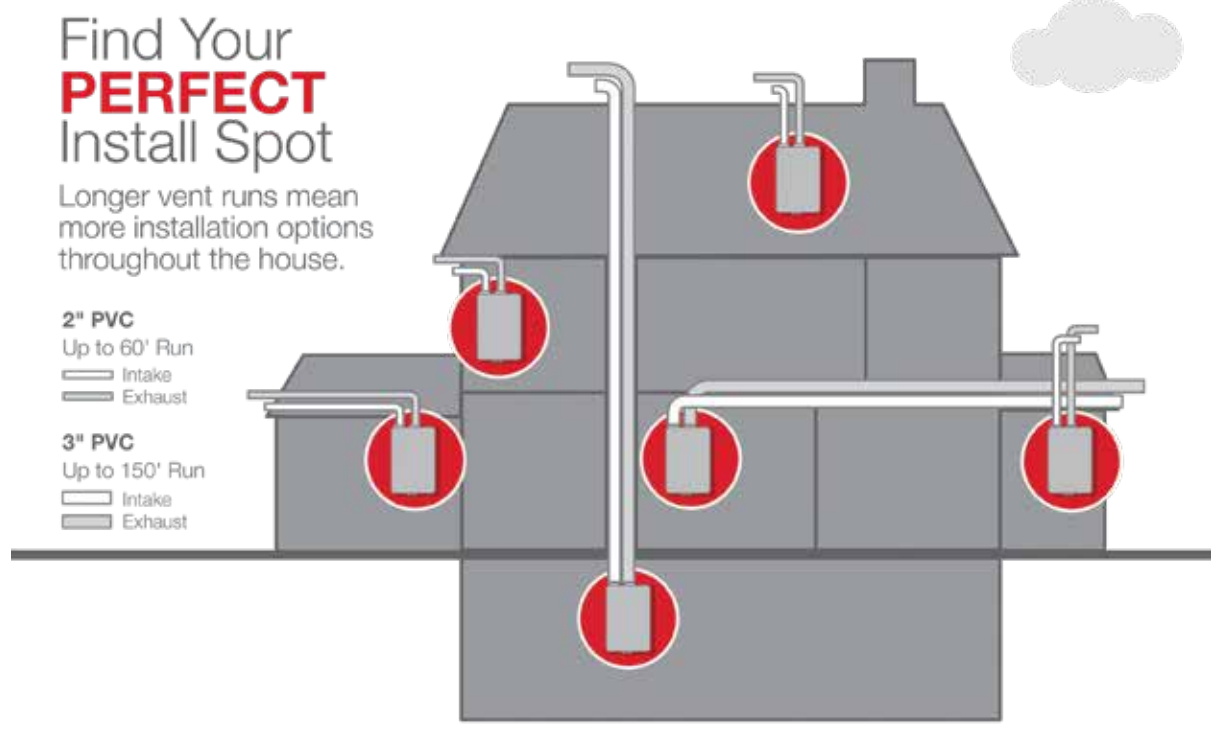

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076 • 1.800.621.5622

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • 1.800.268.6966