

TECHNICAL DATA

SAGN + EL3T		SAGN18 + EL3T1812	SAGN24 + EL3T2412	SAGN36 + EL3T3012	SAGN36 + EL3T3612
Rated Cooling Capacity @T1	Btu/hr	19460	26000	29600	38300
Rated Cooling Capacity @T3	Btu/hr	17450	24200	27500	34500
EER @T1	Btu/W-hr	13.0	13.0	11.8	13.2
EER @T3	Btu/W-hr	9.1	9.7	9.0	9.6
Rated Air Flow	CFM	560	800	1050	1140
Sizes ODU	L (mm)	600	600	803	803
	W (mm)	600	600	803	803
	H (mm)	616	616	913	913
Weight	kg	54.9	54.9	83.5	93.9
Sizes IDU	L (mm)	618	618	640	640
	W (mm)	940	940	1245	1245
	H (mm)	265	265	265	265
Weight	kg	35.4	35.4	44.5	44.5
Refrigerant		R410A			

T1 Condition: 27°C/19°C On-coil, 35°C ambient

T3 Condition: 29°C/19°C On-coil, 46°C ambient

RHEEM MANUFACTURING MEA FZE

Dubai Airport Freezone (DAFZA), UAE

Before proceeding with installation, refer to the installation instructions packaged with each model, as well as complying with all Federal, State, Provincial and local codes, regulation and practices.


"In keeping with its policy of continuous progress and product improvement, Rheem reserves the rights to make changes without notice."

Ducted Split AIR CONDITIO^o NERS



The new degree of comfort.™

SAGN+EL3T Series

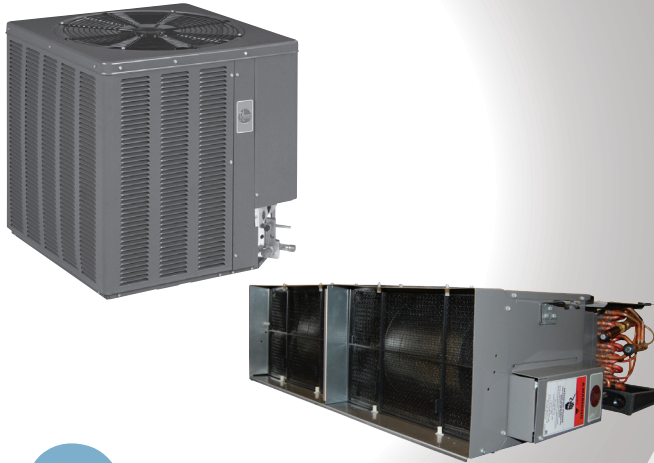

R-410A
50Hz



Scroll Compressor with internal high temperature protection and durable insulation on motor windings



Louvered steel cabinet rated at 1008 hours Salt Spray test as per ASTM-B117 protects the coil from damage



Easily accessible control box



Bi-directional filter drier



Metallic fan blade, increased durability



Low height Air handler unit (10.5" high)



Piston as expansion device for each model



Constant Torque Motor (ECM) for Indoor Unit