



The new degree of comfort™



Residential Gas
Fury Direct Vent
Vertical Water Heaters

Fury™ direct vent vertical gas water heaters use outside air for combustion, offer longer venting options and a coaxial vent for easy installation

Performance

- FHR: 80 gallons for 50-gallon model and up to 66 gallons for 40-gallon model
- Recovery rate is up to 36.4 gallons at a 90 degree rise

Technology

- Adjustable coaxial vent kit allows flexibility of installation and uses outside air for combustion and requires no electrical power
- Internal air tube for reduced footprint

Longer Life

- Patented magnesium anode rod with resistor protects the tank from rust

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation

Plus...

- Brass drain valve and temperature and pressure relief valve are included
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- Heat saving flue baffle design
- Gas control and combination thermostat
- Piezo ignition

Warranty

- 6-Year limited tank and 2 year parts warranty



FURY Direct Vent Vertical
40 and 50-Gallon Capacities
up to 36,000 Btu/h
Natural Gas & LPG





These units can only be installed with the roof jacks listed below

CO-AXIAL ROOF JACK SIZING TABLE

34° MAX. (8 – 12 PITCH) ROOF JACK KIT PART NO.	42° MAX. (10-3/4 – 12 PITCH) ROOF JACK KIT PART NO.	ROOFJACK ADJUSTMENT RANGE (SEE X)
AP14363A	AP14334A	24 - 37"
AP14363B	AP14334B	33 - 68"
AP14363C	AP14334C	45 - 97"
AP14363D	AP14334D	60 - 130"
AP14363E	AP14334E	72 - 160"

Roof Jacks must be ordered separately with this direct vent water heater and installed in accordance with the instructions furnished with the heater. No other roof jack or vertical vent kit is approved for installation with this heater.

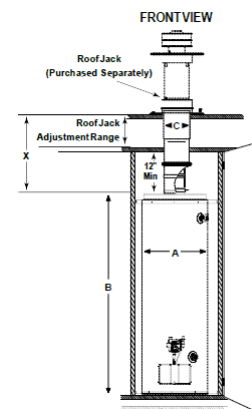

DESCRIPTION			FEATURES						DIMENSIONS				ALTITUDE RATING		ENERGY INFO.	
TYPE	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		DIAMETER	TANK HT.	VENT SIZE	HT. TO GAS CONN.	HT. TO SIDE T&P	SHIP. WT. (LBS)	FEET ABOVE SEA	ENERGY FACTOR NAT.
			NAT.	LP	NAT.	LP	NAT.	LP								
TALL	40	22DV40F-VX	36	30	36.4	30.3	66	65	19-3/4	59-3/4	5	14-1/4	51-5/8	155	7,700	0.59
	50	22DV50F-VX	36	32	36.4	32.3	80	80	21-3/4	59-1/2	5	14-1/4	52-1/2	165	7,700	0.59

Specify LP gas when ordering. Add "PF" suffix to the model number. Example 22DV40PF-VX
Energy Factor based on D.O.E. (Department of Energy) test procedures. D.O.E.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Manufacturing MEA FZE
Dubai Airport Free Zone - Dubai, UAE
www.rheem-mea.com



INTEGRATED HOME COMFORT