



The new degree of comfort.™

## The Fury® gas water heater line is engineered for more hot water at a low operating cost

### Performance

- FHR: 189 - 511 liters, based on liter capacity
- Recovery rate is 100 to 289 liters at a 50 degree Celsius rise

### Features


- Exclusive Rheemglas® tank lining resists corrosion
- R-Foam® insulation for superior heat retention
- Temperature and pressure relief valve included
- Gasmaster™ burner with precision port alignment for even heat transfer
- Heat saving flue baffle design
- Model specific burners engineered for high MJ/H input
- LP models feature durable stainless steel burners designed specifically for LP gas and Robertshaw® controls
- Side relief valve connection
- Maximum working pressure of 150 PSI (10 BARS)

### Options available

- Piezo ignition
- Vent safety switch
- CE certification

### Warranty

- 6-Year limited tank and 2 year parts warranty

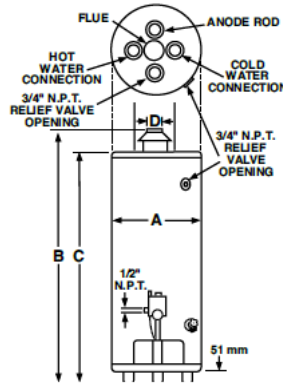

**FURY**  
114 to 379-Liter Capacities  
up to 79.1 MJ/H  
Natural Gas & LPG



TYPE	DESCRIPTION		FEATURES				DIMENSIONS (SHOWN IN MM)					
	LTR. CAP.	MODEL NUMBER	MJ/H		RECOVERY IN LTR. @ 50°RISE	FIRST HOUR DELIVERY LTR.	TANK DIAMETER A	VENT HEIGHT B	TANK HEIGHT C	VENT SIZE D	APPROX SHIP WT. (Kg)	INSULATION THICKNESS (MM)
NAT	LP											
T A L L	114	25V30-6	33.7	-	122	201	400	1499	1422	76	44	22
	114	25V30-7P	-	31.6	115	193	400	1499	1422	76	44	22
	151	25V40-7	35.9	-	130	220	451	1524	1435	76	50	22
	151	25V40-7P	-	35.9	130	220	451	1524	1435	76	50	22
	189	25V50-2	38	-	138	257	502	1549	1448	76	65	22
	189	25V50-2P	-	38	138	257	502	1549	1448	76	65	22
	189	25V50-4	52.7	-	192	314	502	1549	1448	102	67	22.4
	189	25V50-4P	-	52.7	192	314	502	1549	1448	102	67	22
	189	25V50-6	63.3	-	229	360	584	1613	1518	102	81	63
	189	25V50-6P	-	63.3	229	360	584	1613	1518	102	81	63
	284	25VR75	79.1	-	289	481	667	1638	1537	102	145	54
	284	25VR75P	-	79.1	289	481	667	1638	1537	102	145	54
	379	25V100	79.1	-	289	511	667	1727	1626	102	159	28
S H O R T	379	25V100P	-	79.1	289	511	667	1727	1626	102	159	28
	114	25V30S-2	27.4	-	100	189	451	1238	1149	76	42	22
	114	25V30S-2P	-	27.4	100	189	451	1238	1149	76	42	22
	151	25V40S-2	29.5	-	107	250	502	1276	1207	76	46	22
	151	25V40S-2P	-	29.5	107	250	502	1276	1207	76	46	22

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Manufacturing MEA FZE  
Dubai Airport Free Zone - Dubai, UAE  
www.rheem-mea.com



INTEGRATED HOME COMFORT